



Prostal Limited.

1F., No.40, Aly. 22, Ln. 143, Ruiping Rd., Yangmei Disty, Taoyuan City 32658, Taiwan

TEL: +886-3-4828372 Fax: +886-3-4828377

URL: www.prostal.com.tw E-MAIL: joan@prostal.com.tw

Vat number: 24849130


Prostal offers several types of LC Adaptor which are more compact and user-friendly. Its design provides junction between LC/PC connectors that occupy less space.

#Y0200046

LC Adaptor, Single mode, Zirconia Sleeve,
Plastic Housing, Simplex Flanged Type

#Y0200047

LC Adaptor, Multimode, Bronze Sleeve,
Plastic Housing, Simplex Flanged Type

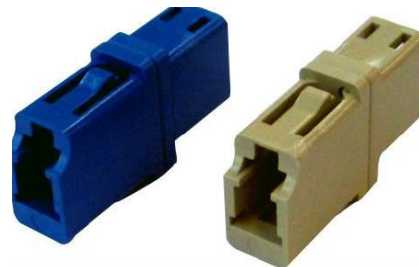

Y0200046&Y0200047

#Y0200051

LC Adaptor, Single mode, Zirconia Sleeve,
Plastic Housing, Duplex Step Type

#Y0200052

LC Adaptor, Multimode, Bronze Sleeve,
Plastic Housing, Duplex Step Type




Y0200051

#Y0200053

LC Adaptor, Single mode, Zirconia Sleeve,
Plastic Housing, Duplex, SC Footprint

#Y0200054

LC Adaptor, Multimode, Bronze Sleeve,
Plastic Housing, Duplex, SC Footprint

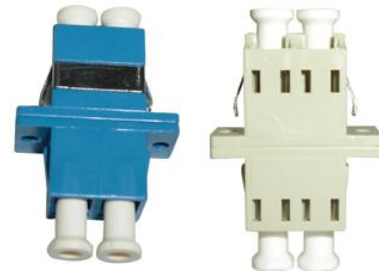

Y0200053&Y0200054

#Y0200056 & Y0200058

LC, PC /APC Adaptor, Zirconia Sleeve,
Plastic Housing, Square Type



Y0200056&Y0200058

#Y0200061

LC, APC Adaptor, Zirconia Sleeve,
Plastic Housing, Square Type



Y0200061



Y0200184



Prostal Limited.

Vat number: 24849130

1F., No.40, Aly. 22, Ln. 143, Ruiping Rd., Yangmei Disty, Taoyuan City 32658, Taiwan

TEL: +886-3-4828372 Fax: +886-3-4828377

URL: www.prostal.com.tw E-MAIL: joan@prostal.com.tw

LC Adaptor

Part#	Brand	Type	Housing	Sleeve	Style
Y0200046	Prostal	Single mode	Plastic	Zirconia	Simplex, Flanged
Y0200047	Prostal	Multimode	Plastic	Bronze	Simplex, Flanged
Y0200048	Prostal	APC	Plastic	Zirconia	Simplex, Flanged type
Y0200049	Prostal	Single mode	Plastic	Zirconia	Duplex, Symmetry type
Y0200050	Prostal	Multimode	Plastic	Bronze	Duplex, Symmetry type
Y0200051	Prostal	Single mode	Plastic	Zirconia	Duplex, Step
Y0200052	Prostal	Multimode	Plastic	Bronze	Duplex, Step
Y0200053	Prostal	Single mode	Plastic	Zirconia	Duplex, SC Footprint
Y0200054	Prostal	Multimode	Plastic	Bronze	Duplex, SC Footprint
Y0200055	Prostal	APC	Plastic	Zirconia	Duplex, SC Footprint
Y0200056	Prostal	Single mode	Plastic	Zirconia	Duplex, SC W/O Footprint
Y0200057	Prostal	Multimode	Plastic	Bronze	Duplex, SC W/O Footprint
Y0200058	Prostal	APC	Plastic	Zirconia	Duplex, SC W/O Footprint
Y0200059	Prostal	Single mode	Plastic	Zirconia	QX,SC Footprint
Y0200060	Prostal	Multimode	Plastic	Bronze	QX,SC Footprint
Y0200061	Prostal	APC	Plastic	Zirconia	QX,SC Footprint
Y0200183	Prostal	OM3/Aqua	Plastic	Bronze	Simplex, Flanged
Y0300184	Prostal	OM3/Aqua	Plastic	Bronze	Duplex, Flanged
Y0300213	Prostal	APC	Plastic	Zirconia	Duplex, without Flanged



General Specifications:

Insertion Loss	0.2dB max
Durability (500 matings)	0.2dB max
Operating temperature	-40 C ~ +85 C