

1F., No.40, Aly. 22, Ln. 143, Ruiping Rd., Yangmei Disty, Taoyuan City 32658, Taiwan

Vat number: 24849130

TEL: +886-3-4828372 Fax: +886-3-4828377

URL: www.prostal.com.tw E-MAIL: joan@prostal.com.tw

Hand tools for Fiber Cable

Version: 2016A

Description: Fiber optics stripper	Pictures / Model Number
• For stripping 250 micron buffer coating to	
expose 125 micron cladded fiber	
 Second hole for striping 2-3mm fiber jackets 	O Contraction of the Contraction
• 140um diameter hole and V-opening in blade	PR221001
allows removal of 250 micron buffer coating	500
from 125 micron fiber	(A)
 Pre-set at the factory – no adjustments needed 	
Will not scratch or nick glass fiber	ing case.
• All stripping surfaces are manufactured to precise	
tolerances to assure clean, smooth strips	
Comfort-grip, ergonomic handles	
 Lock to hold tool closed when it is not in use 	

Description: Fiber optics stripper	Pictures / Model Number
• For stripping 250 micron buffer coating to expose	
125 micron cladded fiber	
 Second hole for striping 2-3mm fiber jackets 	PR221002
• 140um diameter hole and V-opening in blade	90 CF8-2
allows removal of 250 micron buffer coating from	620
125 micron fiber	
• Pre-set at the factory – no adjustments needed	
Will not scratch or nick glass fiber	
 All stripping surfaces are manufactured to precise 	
tolerances to assure clean, smooth strips	
 Comfort-grip, ergonomic handles 	
• Lock to hold tool closed when it is not in use	



1F., No.40, Aly. 22, Ln. 143, Ruiping Rd., Yangmei Disty, Taoyuan City 32658, Taiwan

Vat number: 24849130

TEL: +886-3-4828372 Fax: +886-3-4828377

Description: Fiber optics stripper	Pictures / Model Number
• For stripping 250 micron buffer coating to	
expose 125 micron cladded fiber	
 Precision diameter hole & V-opening in blade 	PR221003
allow for accurate buffer coating removal	The state of the s
 Pre-set at the factory – no adjustments needed 	CFS-2-900
 All cutting surfaces are precision formed, 	
hardened, tempered and ground	
• All stripping surfaces are manufactured to precise	
tolerances to assure clean, smooth strips	
Comfort-grip, ergonomic handles	
• Lock to hold tool closed when it is not in use	

Description: Fiber optics stripper	Pictures / Model Number
 For stripping 250 micron buffer coating to expose 125 micron cladded fiber 	
 Second hole for striping 2-3mm fiber jackets 	
• 140um diameter hole and V-opening in blade	_
allows removal of 250 micron buffer coating	
from 125 micron fiber	Blocky
 Pre-set at the factory – no adjustments needed 	
 Will not scratch or nick glass fiber 	
• Length:136.5mm, Weight: 71g	34400
 PR221004 Miller Fiber Optic Stripper (Strips 	PR221004
250um)	FR221004
PR221004A Dual Hole Stripper (Strips 250um or	
900um)	
PR221004B Tri-Hole Stripper (Strips	
250um,900um,3mm Jacket)	



1F., No.40, Aly. 22, Ln. 143, Ruiping Rd., Yangmei Disty, Taoyuan City 32658, Taiwan

Vat number: 24849130

TEL: +886-3-4828372 Fax: +886-3-4828377

Description: Fiber optics tri-hole stripper	Pictures / Model Number
 Ribbon Stripper (outside jacket) Tri-Hole Stripper (Strips 250um,900um,3mm Jacket) Model Number: PR221005 	PR221005

Easy to use, No Nik Fiber Optic Strippers are	Description: NO-NIK Strippers PR221006	Pictures / Model Number
available to you in a range of color-coded models for quick identification. PR221006	Easy to use, No Nik Fiber Optic Strippers are available to you in a range of color-coded models	Service de la constitución de la

Description: STRIP TOOLS	Pictures / Model Number
 Micro-Strip® stripping tools can be strip buffered fiber up to 2360µm, and jacketed fiber up to 3.5 mm quickly and easily. Model Number: PR221007, PR221008 	PR221007 PR221008 PR221008



1F., No.40, Aly. 22, Ln. 143, Ruiping Rd., Yangmei Disty, Taoyuan City 32658, Taiwan

Vat number: 24849130

TEL: +886-3-4828372 Fax: +886-3-4828377

Description: Tri-hole Fiber optics stripper	Pictures / Model Number
Three hole fiber optic stripper model	
performs all common fiber stripping Second	
hole for striping 2-3mm fiber jackets	
functions, this fiber optic stripper strips the	
1.6-3 mm fiber jacket down to the 600-900	white the second
micron buffer coating, the second hole strips	PR221009
the 600-900 micron buffer coating down to	1 1722 1003
the 250 micron coating and the third hole is	
used to strip the 250 micron cable down to	
the glass fiber without nicks or scratches	
• Model No.: PR221009	

Description: Adjustable Fiber Optic Strippers	Pictures / Model Number
 Dual-Hole Adjustable Striper is professional 	
stripper for optical fiber cable	PR221010
 Available for jacket and coating stripping, All 	
cutting blade processed by	
• Model No.: PR221010	

Description: Adjustable Fiber Optic Strippers	Pictures / Model Number
 Dual-Hole Adjustable Stripper is professional stripper for optical fiber cable available for jacket and coating stripping, All cutting blade processed by precision molding, wearable and long lifetime Stripping completely, not to damage fiber core. Adjustable stripping range: 0.102.60mm compact and easy to handle, size: 6 inch 	PR221011



1F., No.40, Aly. 22, Ln. 143, Ruiping Rd., Yangmei Disty, Taoyuan City 32658, Taiwan

Vat number: 24849130

TEL: +886-3-4828372 Fax: +886-3-4828377

Description: Fiber optics stripper	Pictures / Model Number
New fiber stripper with center feed design allows	
for longitudinal approach fiber	PR221012
Brand: Miller	PRZZ TO 12

Description: Fiber optics stripper	Pictures / Model Number
 New developed fiber stripper with center feed design allows for longitudinal approach fiber US Conec Ribbon Stripper Model No.: PR221013 	PR221013

Description: Fiber optics stripper	Pictures / Model Number
• It is designed with a small, lightweight, easy to	
use, longitudinal peel, peel force is small, high	######################################
quality fiber stripping	
 blade durable and easy to replace 	では、これでは、「「「「「」」を表現しています。 「「」 「「」 「」 「」 「」 「」 「」 「」 「」 「」 「」 「」 「
• using linear bearing guide and thermal stripping	
methods to ensure no damage to the fiber, easy	
to strip the coating layer fiber stripping and high	
efficiency	ではないのはののののの をはない という かんしゅう かんしゅう かんしゅう かんしゅう かんかん かんかん かんかん かんかん かんかん かんかん かんかん かん
• It has overall with fiber stripping and window	
functions	



1F., No.40, Aly. 22, Ln. 143, Ruiping Rd., Yangmei Disty, Taoyuan City 32658, Taiwan

TEL: +886-3-4828372 Fax: +886-3-4828377

URL: www.prostal.com.tw E-MAIL: joan@prostal.com.tw

Description: Fiber optics stripper

- It is designed with a small, lightweight, easy to use, longitudinal peel, peel force is small, high quality fiber stripping
- blade durable and easy to replace
- using linear bearing guide and thermal stripping methods to ensure no damage to the fiber, easy to strip the coating layer fiber stripping and high efficiency
- It has overall with fiber stripping and window functions

Pictures / Model Number

Vat number: 24849130



Description: Fiber optics stripper

- It is designed with a small, lightweight, easy to use, longitudinal peel, peel force is small, high quality fiber stripping
- blade durable and easy to replace
- using linear bearing guide and thermal stripping methods to ensure no damage to the fiber, easy to strip the coating layer fiber stripping and high efficiency
- It has overall with fiber stripping and window functions

Pictures / Model Number



Description: Fiber optics stripper

- These precision strippers feature a mini heater oven that heats and softens the coating or buffer being removed to result in a quick, easy and precision strip every time
- Hot Stripper for strips 250um/900um

Pictures / Model Number





1F., No.40, Aly. 22, Ln. 143, Ruiping Rd., Yangmei Disty, Taoyuan City 32658, Taiwan

TEL: +886-3-4828372 Fax: +886-3-4828377

URL: www.prostal.com.tw E-MAIL: joan@prostal.com.tw

Description: Fiber optics stripper

- Optical Fiber Thermal Buffer Stripper is an alternative to mechanical buffer removing tools when there is a requirement for reliable and 100% clean removal of buffer materials from optical fibers, which is a must in mechanical and fusion splicing, as well as in termination of some traditional ferrule-based connectors. Use these unique tools for single (discreet) fibers or for 2-12 fiber ribbon stripping applications. 10 to(discreet) fibers or for 2-12 fiber ribbon stripping applications. 10 to 20 second quick heat up. Four types of fiber holders:1-, 4-, 8-, and 12-fiber capacity, Battery life 5 hours, continuous heating.
- Ordering information:
 PR221017 Thermal Fibre Stripper
 PR221017-1 Stripper Fiber Holder, "x"-Fiber
 Capacity

Pictures / Model Number

Vat number: 24849130



Description: Fiber optics stripper

- These precision strippers feature a mini heater oven that heats and softens the coating or buffer being removed to result in a quick, easy and precision strip every time.
 The Soft-Strip® tools use the same replaceable, interchangeable blade
- To Order a Complete Soft-Strip Ribbon stripping Tool or Replacement Blade set, please contact with us for more information.

Pictures / Model Number





1F., No.40, Aly. 22, Ln. 143, Ruiping Rd., Yangmei Disty, Taoyuan City 32658, Taiwan

Vat number: 24849130

TEL: +886-3-4828372 Fax: +886-3-4828377

URL: www.prostal.com.tw E-MAIL: joan@prostal.com.tw

Pictures / Model Number Description: Fiber optics stripper • PR221018 is the industry's first hot jacket remover that meets IPX1 (water proof protection Class1) and withstands harsh environmental conditions. Lightweight, splash-proof, portable and rugged design Easy fiber coating removalEasy PR221018 fiber coating removal Accept 3 way power supply (Battery/AC/DC) Console panel is located on the top of the remover for ease of operation. Bright LEDs make it PR221018 PR221018 easier check remover settings. The jacket remover is also 1. PUSH equipped with power save and 2. STRIPPER auto power off functions.

Description: Fiber optics jacket stripper	Pictures / Model Number
• 4-Hole Jacket Stripper	PR221024
	PR221024



1F., No.40, Aly. 22, Ln. 143, Ruiping Rd., Yangmei Disty, Taoyuan City 32658, Taiwan

Vat number: 24849130

TEL: +886-3-4828372 Fax: +886-3-4828377

Description: Adjustable Rotary Cable Stripper	Pictures / Model Number
• Used for removing the outer sheath (PVC &	
Plenum types) , provided you safety and	PR221025
efficiency.	
	14
	(an o) aline

Description: Fiber optics stripper	Pictures / Model Number
 PR221026 (6" wire stripper w/cutter), strips and cuts 30-20 AWG (0.2-0.8 mm) wire sizes PR221026-1 (7" wire stripper w/cutter), strips and cuts 22-10 AWG (0.6-2.60 mm) wire sizes 	PR221026

Description: Fiber optics stripper	Pictures / Model Number
 strips and cuts 20-10 AWG (0.8-2.6mm) wire sizes Model No.: PR221021, PR221022, PR221023 	PR221023 PR221022



1F., No.40, Aly. 22, Ln. 143, Ruiping Rd., Yangmei Disty, Taoyuan City 32658, Taiwan

Vat number: 24849130

TEL: +886-3-4828372 Fax: +886-3-4828377

Description: Fiber optics stripper	Pictures / Model Number
 PR221027 (6" wire stripper w/cutter), strips and cuts 20-10 AWG (0.8-2.6 mm) wire sizes PRO221027-1 (6" wire stripper w/cutter), strips and cuts 30-16 AWG (0.25-1.3 mm) wire sizes 	PR221027

Description: Fiber optics stripper	Pictures / Model Number
 Has adjustable screw stop for different wire sizes, and cushion grips. Cut and strips both solid and stranded wire, cleanly and neatly. Hardened with ground blades. 	PR221028

Description: Fiber optics stripper	Pictures / Model Number
• FTTH flat drop optical cable stripper PR221031	PR221031
	0 100



1F., No.40, Aly. 22, Ln. 143, Ruiping Rd., Yangmei Disty, Taoyuan City 32658, Taiwan

Vat number: 24849130

TEL: +886-3-4828372 Fax: +886-3-4828377

URL: www.prostal.com.tw E-MAIL: joan@prostal.com.tw

Description: Fiber optics stripper	Pictures / Model Number
• FTTH flat drop optical cable stripper PR221031	PR221031





1F., No.40, Aly. 22, Ln. 143, Ruiping Rd., Yangmei Disty, Taoyuan City 32658, Taiwan

Vat number: 24849130

TEL: +886-3-4828372 Fax: +886-3-4828377

URL: www.prostal.com.tw E-MAIL: joan@prostal.com.tw

Description: FTTH flat drop optical cable stripper	Pictures / Model Number
Tool for FTTH flat drop optical cable. Simple	
jacket removing without fiber damaging	
• Lightweight and compact	Flat Drop Optical Cable PR221030

Pictures / Model Number Description: Fiber optics stripper The Miller PR221204 Fiber Optic Tube Scorer is a uniquely designed precise PR221204 one-step buffer tube scorer that scores tube sizes from 1.6mm to 6.0mm. Made of resilient acetal polymer, it is houses a fixed hardened carbon steel blade that does not require any adjustments. Measures 3.75" x .625". It is used to quickly and easily access fiber in 1.9mm to 3mm buffer tubes in a mid-span Mid-Span Access tool location without damage to fiber. No blade adjustment is necessary as the factory precisely mounts the blades in the tube slitting channels, resulting in consistent and accurate shaves. The tool design incorporates buffer tube size gauges on the tool body for ease of selecting proper tube slitting channel. PR221204-1



1F., No.40, Aly. 22, Ln. 143, Ruiping Rd., Yangmei Disty, Taoyuan City 32658, Taiwan

Vat number: 24849130

TEL: +886-3-4828372 Fax: +886-3-4828377

Description: Round Cable Slitter PR221032	Pictures / Model Number
• for removing the outer sheath(PVC &	
Plenum types) of fiber optic cable	
Adjustable cutting depth for insulation	22
from .12" (3mm) to 1.38" (35 mm)	
thickness	
 Includes spare blade in handle 	
Brand: Stanley	PR221032
Model No.: PR221032	PR221032

Description: Round cable slitter	Pictures / Model Number
 Used for removing the outer sheath (PVC & Plenum types) of fiber optic cable. Adjustable cutting depth for insulation from .18" (4mm) to 1.26" (32 mm) thickness. Includes spare blade in handle. Model No.: PR221033 	PR221033

Description: Round cable slitter	Pictures / Model Number
 Used for removing the outer sheath (PVC & Plenum types) of fiber optic cable. Adjustable cutting depth for insulation from .18" (4mm) to 1.26" (32 mm) thickness. Includes spare blade in handle. Model No.: PR221033 	PR221033



1F., No.40, Aly. 22, Ln. 143, Ruiping Rd., Yangmei Disty, Taoyuan City 32658, Taiwan

Vat number: 24849130

TEL: +886-3-4828372 Fax: +886-3-4828377

URL: www.prostal.com.tw E-MAIL: joan@prostal.com.tw

Description: Rotary cable striper	Pictures / Model Number
 Rotary cable stripper ratcheting cable cutter PR221035 Slit & strip round cables with 0.16" - 1.1"(4.0mm-28.0mm) diameter Adjustable cutting depth, Laser-trimmed, stainless steel blades Great tool for mid-point taps 	PR221035





1F., No.40, Aly. 22, Ln. 143, Ruiping Rd., Yangmei Disty, Taoyuan City 32658, Taiwan

Vat number: 24849130

TEL: +886-3-4828372 Fax: +886-3-4828377

URL: www.prostal.com.tw E-MAIL: joan@prostal.com.tw

Description: Round cable stripper Round Cable Stripper PR221037 PR221037A for smaller diameter cables: 0.178 to 1.14 inches (4.5 - 29 mm) PR221037B for larger diameter cables: 0.75 to 1.58 inches (19 - 40 mm) Blade depth can be regulated by simply turning the blade housing Spiral cut for end stripping or mid-span stripping PR221037B PR221037A PR221037A

Description: Miller Round Cable Stripper Miller Round Cable Stripper PR2210038 The Miller PRO221038 Round Cable Stripper is used for outer jackets & insulations from 0.18 to 1.12 inches (4.5 to 28.5 mm) O.D.Stripping action is both circumferential, then longitudinal for removal of insulation section at the end or mid span of wires. Adjustable depth up to 0.12 inch (3 mm) cutting depth.



1F., No.40, Aly. 22, Ln. 143, Ruiping Rd., Yangmei Disty, Taoyuan City 32658, Taiwan

TEL: +886-3-4828372 Fax: +886-3-4828377

URL: www.prostal.com.tw E-MAIL: joan@prostal.com.tw

Description: Slit & strip for round cables	Pictures / Model Number
• Slit & strip for round cables PR221039	
• Slit & strip round cables with 0.18" - 1"	PR221039
(4.5mm-25.4mm) diameter.	111221033
Adjustable cutting depth	

Description: Longitudinal Cable Sheath Slitter

- Longitudinal Cable Sheath Slitter PR221040
- Tool for safe longitudinal slitting of plastic cable sheaths with different thickness
- Applicable either at the beginning or in the middle of the cable. Additional attachable pieces for slitting optic cables and cables with small diameter available
- Attachable piece, grey for cables up to 25 mm

Pictures / Model Number

Vat number: 24849130



Description: Armored Cable Slitters

- PR221044B: ideal for slitting the corrugated copper, steel or aluminum Central Tube, Stranded Loose Tube fiber optic cables and other armored cables. Lade rotates 90 degrees by activating blade lever, allowing easy mid-span preparation (ringing and slitting). Adjustable from 0.315" (8 mm) to 1.125" (28.6 mm) cable O.D.
- PR221044B: Adjustable from 0.157 in. (4 mm) to .939 in. (10mm) for smaller cable O.D. options. Adjustable blade depth to 5.5 mm maximum to accommodate different cable jackets.

Pictures / Model Number





1F., No.40, Aly. 22, Ln. 143, Ruiping Rd., Yangmei Disty, Taoyuan City 32658, Taiwan

Vat number: 24849130

TEL: +886-3-4828372 Fax: +886-3-4828377

URL: www.prostal.com.tw E-MAIL: joan@prostal.com.tw

Description: Longitudinal Cable Sheath Slitter Longitudinal Cable Sheath Slitter PR221041 Perfect tool for cutting jackets from a variety of fiber optic cable V-opening in balde Adjustable blades with a screwdriver for various size cables Economical tool for multiple cables Works with standard 30-10 AWG (0.05-6mm2) wire in addition to fiber optic cable PR221041

Description: Across and Longitudinal Slitter	Pictures / Model Number
 Description: Across and Longitudinal Slitter Across and Longitudinal Fiber Cable Slitter PR221043 It can do both across and length wise stripping It uses unilateralism ratchet wheel to operate, so that the first-time stripped cable has the symmetry hatches on both sides, as we know, the Side Fiber Cable Ripper must strip twice in the optical cable cut-over with service process, it solve this shortage It can do one-off strip for the fiber cable Ø10~Ø30mm It is portable, compact, easy to operate, timesaving, the cut-in depth can be accommodated and can strip at any part of the fiber cable 	Pictures / Model Number PR221043



1F., No.40, Aly. 22, Ln. 143, Ruiping Rd., Yangmei Disty, Taoyuan City 32658, Taiwan

TEL: +886-3-4828372 Fax: +886-3-4828377

URL: www.prostal.com.tw E-MAIL: joan@prostal.com.tw

Description: Longitudinal Cable Slitter

- Longitudinal Cable Slitter PR221042
- Professional-grade cable slitter designed for longitudinal, circumferential (ringing), and mid-span slitting of corrugated aluminum or copper shield cables, medium-density polyethylene (MDPE), and high-density polyethylene (HDPE) conduits Adjustable blade depth allows slitting of coverings of up to 1/4" (6.3mm) thick
- Blade fully retracts inside body for storage
- Cam-adjustable lever allows blade dig-in in mid-span application
- Lever teeth designed for soft and hard jacket/covering applications
- Longitudinal slitting of cable/duct ranging from 1/2" (12.7mm) to larger sizes
- Circumferential slitting of cable/duct ranging from 1-1/2" (38mm) to larger sizes
- Window cutout to access fibers inside duct ranging from 1-1/2" (38mm) to larger sizes

Pictures / Model Number



PR221042

Vat number: 24849130



Description: Armored Cable Slitters

- It can opens/separates the steel tape armor on fiber optic cable easily, Unique counter rotation mechanism opens steel tape armor in 21/2 31/2 turns, allowing for cutting of the armorrotation mechanism opens steel tape armor in 21/2 31/2 turns, allowing for cutting of the armor
- Accommodates steel tape armor from 1-2mm OD 1.5" (38.1mm) outside diameter fits comfortably in your hand.

Pictures / Model Number





1F., No.40, Aly. 22, Ln. 143, Ruiping Rd., Yangmei Disty, Taoyuan City 32658, Taiwan

Vat number: 24849130

TEL: +886-3-4828372 Fax: +886-3-4828377

URL: www.prostal.com.tw E-MAIL: joan@prostal.com.tw

Description: Fiber Cable Slitter Kit Fiber Cable Slitter Kit PR221046 Splicer's Knife (Length: 159mm) Tough, Coping-style blade, Forged Steel Full size, high dielectric, black-cushioned handle, Multi-purpose tool Stripping notches for 19 and 23 gauge wire Use for splicing wire, cutting harness ties, insulation materials, medium gauge wires and electrical tape Kit inclusive of Holster, Splicer's scissors and Splicer's knife

Pictures / Model Number Description: ACS Armored Cable Slitter • Professional grade tool, ideal for slitting the corrugated copper, steel or armor layer on Fiber PR221047 Feeder, Central Tube, Stranded Loose Tube fiber optic cables and other armored cables • Easily opens/separates the steel tape armor on fiber optic cable • Blade rotates 90° by activating blade lever, allowing easy mid-span • Adjustable from 0.315" (8 mm) to 1.125" (28.6 mm) cable O.D. Rugged anodized aluminum and steel construction



1F., No.40, Aly. 22, Ln. 143, Ruiping Rd., Yangmei Disty, Taoyuan City 32658, Taiwan


Vat number: 24849130

TEL: +886-3-4828372 Fax: +886-3-4828377

URL: www.prostal.com.tw E-MAIL: joan@prostal.com.tw

Description: Kevlar® Cutter Pictures / Model Number Blades made of high carbon alloy steel with vanadium and molybdenum HRC60-62, cutting edge hardness FHV1200 Handles made of thermos-plastic elastomer Extended tang for durability Serrated blade for gripping materials Specially designed for cutting kevlar materials PR22101D PR22101B

Description: Kevlar® Cutter The Miller Kevlar Cutter is designed to cut Kevlar strength members in fiber optic cables. These shears have hardened stainless steel blades with a fine serration on one blade to firmly hold Kevlar fibers and prevent slipping while cutting. Lightweight, compact cutters feature quick cutting action, serrated edge for consistent, cleans cuts and return spring for precise repeated cuts.

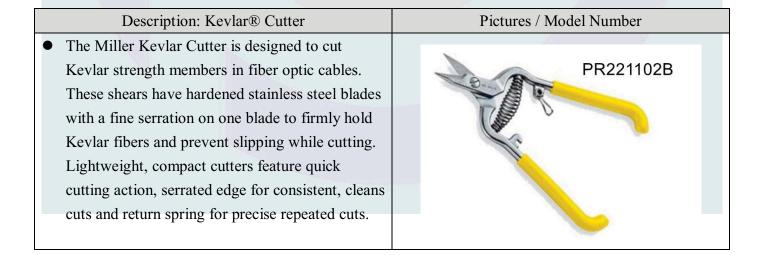



1F., No.40, Aly. 22, Ln. 143, Ruiping Rd., Yangmei Disty, Taoyuan City 32658, Taiwan


Vat number: 24849130

TEL: +886-3-4828372 Fax: +886-3-4828377

URL: www.prostal.com.tw E-MAIL: joan@prostal.com.tw

● The Miller Kevlar Cutter is designed to cut Kevlar strength members in fiber optic cables. These shears have hardened stainless steel blades with a fine serration on one blade to firmly hold Kevlar fibers and prevent slipping while cutting. Lightweight, compact cutters feature quick cutting action, serrated edge for consistent, cleans cuts and return spring for precise repeated cuts.

Description: Kevlar® Cutter The Miller Kevlar Cutter is designed to cut Kevlar strength members in fiber optic cables. These shears have hardened stainless steel blades with a fine serration on one blade to firmly hold Kevlar fibers and prevent slipping while cutting. Lightweight, compact cutters feature quick cutting action, serrated edge for consistent, cleans cuts and return spring for precise repeated cuts.

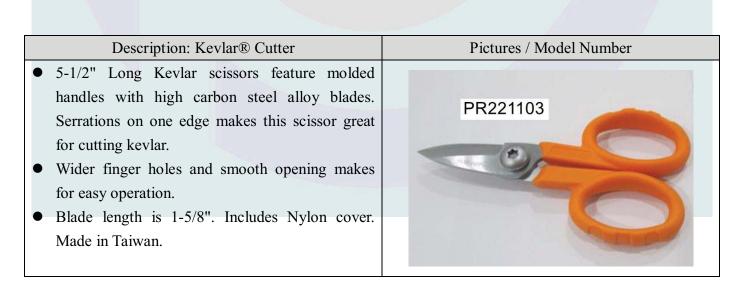



1F., No.40, Aly. 22, Ln. 143, Ruiping Rd., Yangmei Disty, Taoyuan City 32658, Taiwan

Vat number: 24849130

TEL: +886-3-4828372 Fax: +886-3-4828377

Description: Kevlar® Scissor	Pictures / Model Number
Cuts fiberglass aramid fibers.	DD004404
 Zirconia ceramic blades. 	PR221104
 Never needs sharpening. 	
Large finger loops for ease of use.	CERAMIC SCISSOR

Description: Miller IET insertion extraction tool	Pictures / Model Number
Model Nol: PR221106	
• The MILLER IET insertion extraction tool easily	PR221106
inserts and extracts fiber optic connectors in high	
density patch panels. Features; Works with	WILLIAM BY
simplex and duplex LC and SC, as well as MU,	
MT-RJ	

	Description: 3Peak cable cutter	Pictures / Model Number
•	3Peak cable cutter PR221107	
•	The strong cable cutter can be used for cutting	
	almost all kinds of fiber optic cables, from small	
	size break-out cable to 3mm cable, it provides a	
	quick, easy, reliable and clean cutting. it can also	
	be used for kevla cutting. it's ideal for patchcord	PR221107
	manufacturers and field installers.	11/22/107




1F., No.40, Aly. 22, Ln. 143, Ruiping Rd., Yangmei Disty, Taoyuan City 32658, Taiwan

Vat number: 24849130

TEL: +886-3-4828372 Fax: +886-3-4828377

URL: www.prostal.com.tw E-MAIL: joan@prostal.com.tw

Description: Fiber cable cutter	Pictures / Model Number
Application: Thick wire up to 2/0 (70mm²)cable, 100 pair group telephone cable RG-174/RG-9 coax size	PR221108

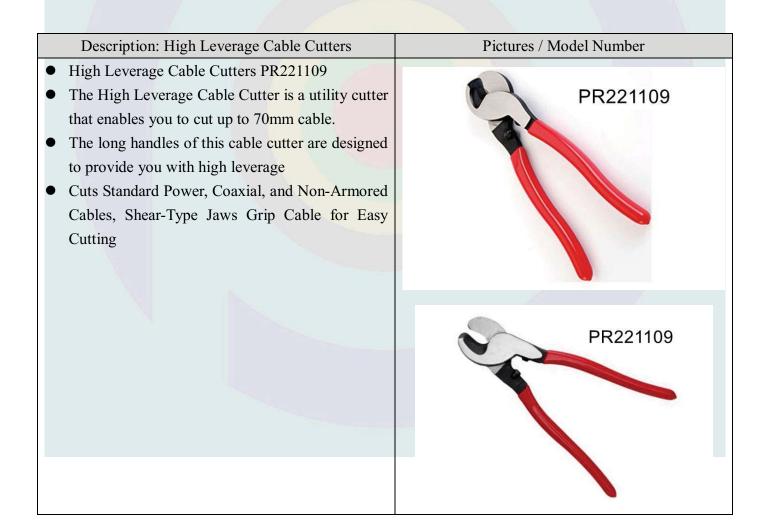



1F., No.40, Aly. 22, Ln. 143, Ruiping Rd., Yangmei Disty, Taoyuan City 32658, Taiwan

Vat number: 24849130

TEL: +886-3-4828372 Fax: +886-3-4828377

URL: www.prostal.com.tw E-MAIL: joan@prostal.com.tw

Description: Precision side cutter Precision side cutter PR221110 It's for Sharpened cutting edges with a hardness of 45-48 HRC. Cuts soft wires with a diameter of up to 2 mm and harder wires up to 1,2 mm.

Description: Cable cutter	Pictures / Model Number
 Cable cutter PR221111 The This strong cable cutter can be used for cutting almost all kinds of fiber optic cables. From small size break-out cable to 3mm cable, it provides a quick, easy, reliable and clean cutting. 	PR221111

Description: 6" Side Cutting Pliers (150mm)	Pictures / Model Number
 6" Side Cutting Pliers (150mm) PR221112 Precisely cuts dot matrix printer firing pin, wire spring, piano wire, hard steel components pinsteel components pin 	PR221112



1F., No.40, Aly. 22, Ln. 143, Ruiping Rd., Yangmei Disty, Taoyuan City 32658, Taiwan

Vat number: 24849130

TEL: +886-3-4828372 Fax: +886-3-4828377

Description: Steel Wire Cutter	Pictures / Model Number
• Steel Wire Cutter PR221113	
Mild steel strand 6mm	DD004440
High tensile steel strand 4mm	PR221113
Hard drawn spring wire 2mm	

Description: Ratchet Cable Cutter	Pictures / Model Number
Ratchet Cable Cutter PR221105	
• The Ratcheting Cable Cutter is great for	PR221105
aluminum armor, Cutting Range: 240mm 2 Max.	11,221199
The cutter is applicable for cutting cu/al cables,	
single strand or multi-strands of cables.	
Attention: Not for cutting steel or steel wire. The	
Ratcheting cutter is great for aluminum armor,	
not intended for ACSR.	
Cuts up to 35mm diameter.	

Description: Ratchet Cable Cutter	Pictures / Model Number
	PR221010



1F., No.40, Aly. 22, Ln. 143, Ruiping Rd., Yangmei Disty, Taoyuan City 32658, Taiwan

Vat number: 24849130

TEL: +886-3-4828372 Fax: +886-3-4828377

URL: www.prostal.com.tw E-MAIL: joan@prostal.com.tw

Description: Fiber Optic Crimp Tool ● For crimping optical fiber connectors ● PR221201A (Crimp Size in Inches: 0.42", 0.078", 0.128", 0.151", 0.178"; in MM: 1.07mm, 1.98mm, 3.25mm, 3.84mm, 4.52mm) ● PR221201B (Crimp Size: 0.151"/ 0.178" HEX/LC RND/ 0.134"/ .190" RND) (Crimp Size: 3.84mm/ 4.52mm HEX/ LC RND/ 3.40mm / 4.82mm RND) ● PR221201C (Crimp Size: 0.042", 0.068", 0.133", 0.162", 0.195") (Crimp Size: 1.07mm, 1.73mm, 3.38mm, 4.11mm, 4.95mm) PR221201 Prictures / Model Number PR221201 PR221201 PR221201 PR221201 PR221201

Description: Fiber Optic Crimp Tool	Pictures / Model Number
• Crimp Size: 0.042", 0.068", 0.128", 0.151", 0.178", .(Hex) or 1.07mm, 1.73mm, 3.25mm, 3.84mm, 4.52mm	PR221202



1F., No.40, Aly. 22, Ln. 143, Ruiping Rd., Yangmei Disty, Taoyuan City 32658, Taiwan

Vat number: 24849130

TEL: +886-3-4828372 Fax: +886-3-4828377

URL: www.prostal.com.tw E-MAIL: joan@prostal.com.tw

Logg Push strangth up to 200/.	Description: Fiber Optic Crimp Tool	Pictures / Model Number
 Interchangeable crimping modules are available Suitable for Fiber Optic SC, ST, FC, SMA, SMA or SFR connectors For crimping optical fiber connectors 	 Less Push strength up to 30% Interchangeable crimping modules are available Suitable for Fiber Optic SC, ST, FC, SMA, SMA or SFR connectors 	

Description: MID-SPAN access tool Pictures / Model Number • Mid-Span Access Tool is an efficient and indispensable tool for fiber optic cable PR221205 termination, It easily slits the PVC cable jacket into two halves before crimping, in both field and plant applications, time is saved and consistency is resulted with this precise and innovative tool. PR221205, for cable diameter: a. Ø4.5mm; b. Ø6.0mm; c.Ø7.0mm; d. Ø8.0mm; e. Ø11.0mm). Tool size(mm):65×56×28; Weight: 6.5g PR221205-1, for cable diameter: PR221205



caps protect blades when not in use

1F., No.40, Aly. 22, Ln. 143, Ruiping Rd., Yangmei Disty, Taoyuan City 32658, Taiwan

Vat number: 24849130

TEL: +886-3-4828372 Fax: +886-3-4828377

URL: www.prostal.com.tw E-MAIL: joan@prostal.com.tw

Description: Fiber Optic Scribe Tool Carbide Blade Dual Scribe PR221301 DualScribe tool has a 30°, single bevel, blade with a 5.55 mm long contact area. The blade is reversible, which doubles the life of the scribe. The soft, non-slip grip provides precise control during scribing. The scribe is approximately 5" long from end to end. Each scribe comes with a clear safety cap to protect the blade from damage when not in use. Provides for a wider cutting surface- 6mm· safety

Description: Fiber Optic Scribe Tool	Pictures / Model Number
 Diamond Fiber Optic Carbide Scribe PR221305 	
 Economical pen-type fiber scribe with non-reversible tip 	
 Provides for a wider cutting surface-4mm Safety caps protect blades when not in use 	
	PR221305

Description: Fiber Optic Scribe Tool	Pictures / Model Number
 Economy Ruby Optic Scribe PR221306 	
 Provides for a wider cutting surface- 6mm 	
 safety caps protect blades when not in use 	
• This scribe tools is used primarily for removing	
optical fiber tips protruding from fiber optic	
connectors, prior to polishing the connector's	
end-face.	
	PR221306
	•



1F., No.40, Aly. 22, Ln. 143, Ruiping Rd., Yangmei Disty, Taoyuan City 32658, Taiwan

Vat number: 24849130

TEL: +886-3-4828372 Fax: +886-3-4828377

Description: Fiber Optic Scribe Tool	Pictures / Model Number
• Economy Ruby Optic Scribe PR221307, with	
non-reversible tip.	
Blades made of diamond grade tungsten steel	
from Germany.	
 Provides for a wider cutting surface- 6mm 	
 safety caps protect blades when not in use 	
• This scribe tools is used primarily for removing	
optical fiber tips protruding from fiber optic	PR221307
connectors, prior to polishing the connector's	
end-face	•

Description: Fiber Optic Scribe Tool	Pictures / Model Number
Carbide Fiber Optic Scribe PR221308	
Blades made of diamond grade tungsten steel	
from Germany.	
Provides for a wider cutting surface- 4mm	
 safety caps protect blades when not in use 	
• This scribe tools is used primarily for removing	
optical fiber tips protruding from fiber optic	PR221308
connectors, prior to polishing the connector's	
end-face	

Description: Fiber Optic Scribe Tool	Pictures / Model Number
Deluxe Carbide Fiber ScribePR221309	
• Blades made of diamond grade tungsten steel	
from Germany.	
 Provides for a wider cutting surface- 4mm 	
• This scribe tools is used primarily for removing	
optical fiber tips protruding from fiber optic	
connectors, prior to polishing the connector's	
end-face	PR221309
	11(221309
	•



1F., No.40, Aly. 22, Ln. 143, Ruiping Rd., Yangmei Disty, Taoyuan City 32658, Taiwan

Vat number: 24849130

TEL: +886-3-4828372 Fax: +886-3-4828377

Description: Fiber Optic Scribe Tool	Pictures / Model Number
• Economy pen-type ruby fiber scribe PR221310	
• Provides for a wider cutting surface- 6mm	
 safety caps protect blades when not in use 	
• This scribe tools is used primarily for removing	
optical fiber tips protruding from fiber optic	
connectors, prior to polishing the connector's	
end-face	PR221310

Description: Fiber Optic Scribe Tool	Pictures / Model Number
	1 lettires / Woder Number
• Economy pen-type Sapphire fiber scribe PR221311	
Provides for a wider cutting surface- 4mm	
safety caps protect blades when not in use	
	PR221311

Description: Fiber Optic Scribe Tool	Pictures / Model Number
 Deluxe Diamond Fiber Scribe PR221312 	
• It has a 60° conical point housed in an attractive	
retractable type metal casing.	
 safety caps protect blades when not in use 	
• This scribe tools is used primarily for removing	
optical fiber tips protruding from fiber optic	
connectors, prior to polishing the connector's	PR221312
end-face	